

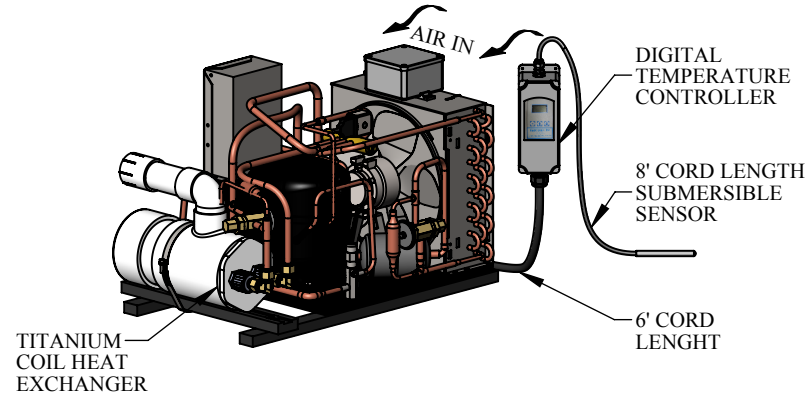


DSHP-4 THRU DSHP-6 HEAT PUMP SPECIFICATION


FOR INDOOR FRESH AND SALT WATER APPLICATIONS

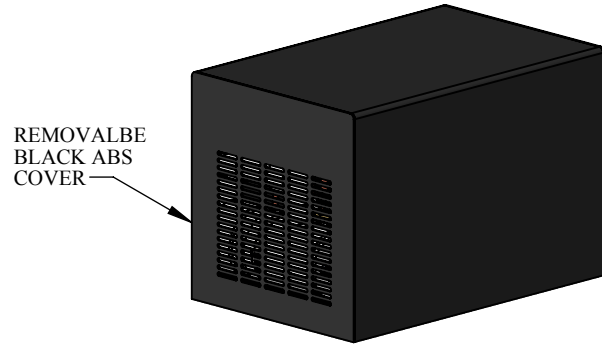


POWER CORD PLUG TYPE



#5-15P
DSHP-4 AND DSHP-5



#6-15P
DSHP-6

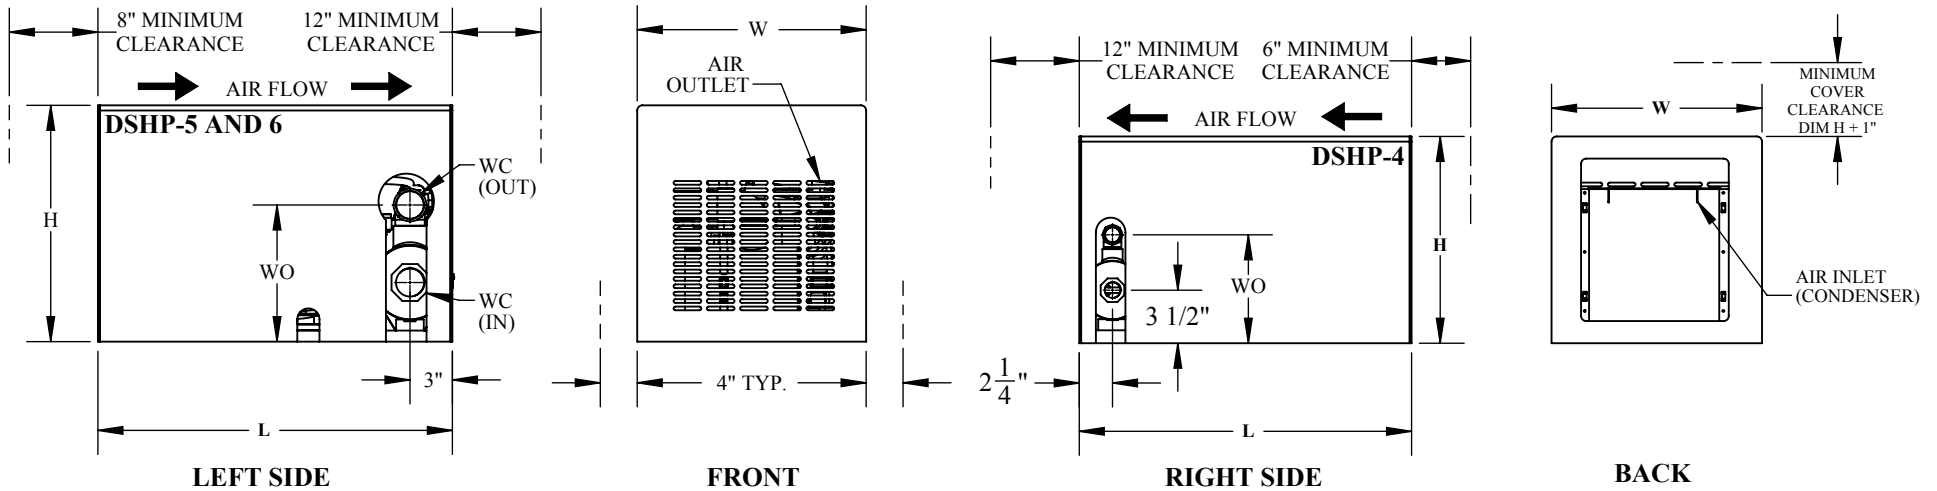

WO: WATER OUTLET WC: WATER CONNECTION SIZE

-ALL MODELS INCLUDES 18" LONG POWER CORD AND 6' CONTROL TETHER.

HEAT PUMP SPECIFICATIONS															
MODEL NO.	HP	NOMINAL BTUH	R134A REFRIGERANT CHARGE (OZ)	VOLTS / PHASE	WATTS	AMPS.	WATER FLOW RATE (GPM)	AIR OUTLET (CFM)	L	W	H	WO	WC WATER IN / OUT (FPT)	SHIPPING WEIGHT (LBS.)	SHIPPING DIMENSION (IN.)
DSHP-4	1/3	4,000	8.5	115	828	7.2	10-20	260	22 1/2"	14 1/4"	14"	7 1/2"	3/4"	90	39 x 18 x 16
DSHP-5	1/2	6,000	10	115	1092	9.5	12-25	350	24"	15 1/2"	16"	9 1/4"	1 1/2"	135	33 x 26 x 25
DSHP-6	1/2	6,000	10	230 / 1	1104	4.8	12-25	350	24"	15 1/2"	16"	9 1/4"	1 1/2"	135	33 x 26 x 25

NOTE:

- DO NOT OPERATE IN HEAT MODE BELOW 55°F AIR TEMPERATURE.
- ALL MODELS MUST HAVE ACCESS FOR CLEANING OF CONDENSER.
- ALL DIMENSIONS ARE APPROXIMATE AND MAY CHANGE AT ANY TIME.



9558 Camino Ruiz, San Diego, CA 92126

DRAWING # PDF-0104 SHEET TITLE DSHP-4 THRU DSHP-6 SPECIFICATIONS

* COPYRIGHT *
These drawings including design idea and construction techniques herein are the sole property of Aquo Logic Inc. They shall not be revised, copied, or reproduced in any manner without the written consent of Aquo Logic Inc.

DESCRIPTION
DELTA STAR AIR COOLED HEAT PUMP

DRAWN BY Arnaldo Guzman DATE 11/13/2015

REVISION

SCALE 1:12 SHEET # 1 OF 1