

**HYDROMARINE CHILLER 6, 7.5 & 10 TONS** TITANIUM HEAT EXCHANGER FOR USE IN ALL AQUATIC CHILLING APPLICATIONS

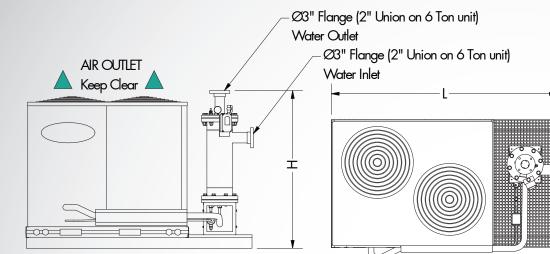

**PLAN VIEW** 

	SPECIFICATIONS				DIMENSIONS			POWER OPTIONS	
MODEL NUMBER	Nominal Tonnage / BTUH	Vertical Air Discharge (CFM)	∆ PSI at max flow	Water Flow Range (GPM)	Length (L)	Width (W)	Max. Height (H)	208-230V / 3 ph. MCA	460V / 3 ph. MCA
DH-SC-6	6 / 72 000	6 000	<5	60 - 120	84"	48″	61"	28	12
DH-SC-7.5	7.5 / 90 000	6 000	<5	80 - 150	84"	48″	61"	34.3	16.9
DH-SC-10	10 / 120 000	6 000	<5	90 - 150	84"	48″	61"	40.6	22.5

\*MCA is the highest steady-state electrical current that the unit should see when operating correctly \*Nominal Tonnage is based on entering water temperature of 70°F




**FRONT VIEW** 

FLOW SWITCH NOTE: FLOW SWITCH MUST BE INSTALLED HORIZONTALLY ON INLET OF HEAT EXCHANGER, WITH MINIMUM STRAIGHT PIPE DISTANCES BEFORE AND AFTER AS SHOWN IN DRAWING. OPTIONAL FACTORY MOUNT & WIRE.



## THERMOWELL

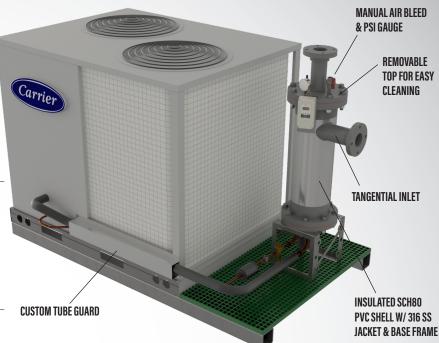

NOTES:

≥

- DUAL COMPRESSOR/EVAPORATOR DESIGN FOR INCREASED ENERGY EFFICIENCY, FLOW CAPABILITY
  AND REDUNDANCY.
- CONDENSER AND SKID MOUNTED ON 4" MARINE GRADE ALUMINUM SQUARE TUBE
- Gr.2 TITANIUM TUBE HEAT EXCHANGER COILS
- NORMAL OPERATING AMBIENT AIR TEMPERATURE: 50 F 115 F
- ALL CONDENSING UNITS HAVE EER OF 11 OR BETTER.
- TOP DISCHARGE AREA SHOULD BE UNRESTRICTED FOR 48 INCHES MINIMUM
- AVOID PLACING UNIT IN DIRECT AREA OF ROOF RUNOFF OR CONSTANT WATER FLOW
- CONSULT CARRIER SPECIFIED CONDENSER CLEARANCES WHEN PLACING UNIT(S)
- SCH 80 PVC SHELL CONSTRUCTION WITH REMOVABLE FLANGED ENDS
- ALL 316 SS BASE, JACKET AND HARDWARE
- TEMPERATURE CONTROLLER CAN BE SET +/- 0.1° F/C. RECOMMENDED MINIMUM SETPOINT IS 45°F
- UNIT ARRIVES CHARGED WITH R-410A REFRIGERANT
  - HAIL GUARD

## **OPTIONS:**

- LOW AMBIENT MOTORMASTER KIT FOR OUTDOOR TEMPERATURES -0°F TO 55°F
- MARINE CONDENSER COATING FOR COASTAL APPLICATIONS
- LOW TEMP APPLICATION EVAPORATOR FREEZE GUARD
- NON-FUSED DISCONNECT
- 115V CONVENIENCE OUTLET



9100 Bolton Ave., Hudson, FL, 34667 (727) 861-2421 - info@deltahydro.com