
## MT-15 & MT-20 SPECIFICATION


FOR INDOOR OR OUTDOOR FRESH AND SALT WATER APPLICATIONS

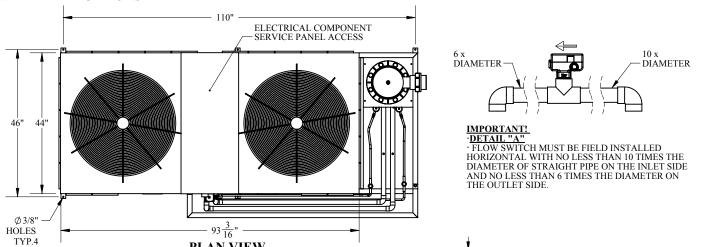

- \*NOTES:
   TOP DISCHARGE AREA SHOULD BE UNRESTRICTED
- FOR 100 INCHES MINIMUM.
- · UNIT SHOULD BE PLACED SO ROOF RUN-OFF
- WATER DOES NOT POUR DIRECTLY ON UNIT.
   MINIMUM CLEARANCE FOR PROPER OPERATION IS 36 INCHES FROM WALLS, SHRUBBERY, FENCES,
- · MINIMUM CLEARANCE BETWEEN ADJACENT UNITS IS 72 INCHES.
- · ALL DIMENSIONS ARE APPROXIMATE AND CAN CHANGE AT ANY TIME.

## **OPTIONS:**

- · SCH 80 SHELL CONSTRUCTION.
- 316 STAINLESS STEEL STAND AND HARDWARE.
  LOW AMBIENT HEAD PRESSURE CONTROL
- (USE IN 50 °F WEATHER AND BELOW).
- · HAIL GUARDS TO PROTECT CONDENSER FINS.
- · COASTAL MARINE CONDENSER COATING.

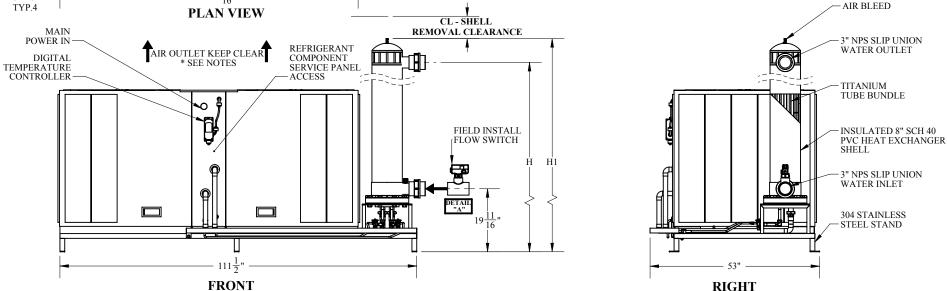

MULTI-TEMP WATER CHILLERS												
MODEL NO.	NOMINAL CAPACITY TONS / BTUH / KW	VOLTS / PHASE	AMPS RLA / LRA	UNIT OPERATING VOLTAGE RANGE	MINIMUM CIRCUIT AMPACITY	MAXIMUM FUSE SIZE OR MAXIMUM CIRCUIT BREAKER (a)	WATER FLOW RATE (GPM)	AIR OULET EA. FAN (CFM)	Н1	н	CL	SHIPPING WEIGHT (~lbs.)
MT-15	15 / 180K / 52.7	208 - 230 / 3	50 / 164	187 - 253	66.3	80	120 / 180	9750	78"	72 1/2"	63 1/2"	1559
MT-15-460	15 / 180K / 52.7	460 / 3	25 / 100	414 - 506	33.4	40	120 / 180	9750	78"	72 1/2"	63 1/2"	1559
MT-20	20 / 240K / 70.2	208 - 230 / 3	78 / 267	187 - 253	98	110	120 / 180	9750	91"	83 1/2"	75 1/2"	1714
MT-20-460	20 / 240K / 70.2	460 / 3	40 / 142	414 - 506	46.9	60	120 / 180	9750	91"	83 1/2"	75 1/2"	1714

9558 Camino Ruiz, San Diego, CA 92126 DRAWING # SHEET TITLE

DESCRIPTION \* COPYRIGHT \* These drawings including design idea and construction techniques herin are the sole property of Aqua Logic Inc. They shal not be revised, copied, or reproduced in an

manner without the written consent of Aqua Logic Inc..

MULTI TEMP AIR COOLED WATER CHILLER

MT-15 & MT-20 **SPECIFICATIONS** 

aguaLegic'

REVISION SHEET # DRAWN BY DATE SCALE ARNALDO GUZMAN 6/5/2015

PDF-0305

-(a) HACR TYPE CIRCUIT BREAKER PER NEC